

Advanced Type Wireless Kit for Covert Camera Use

1.2/2.4 Ghz Portable A/V Transmitter & Receiver Kit


Feature

- Wired covert cameras double its value when work in conjunction with Portable Wireless A/V Transmitter & Receiver Kit and become wireless cameras.
- Vibration Alert when battery power is low
- Brilliant looking Mag-Aluminum alloy housing, great solution for heat sink
- Receiver utilizes 2000mAh ultra high capacity removable FUJI camcorder battery
- Single general stereo jack socket on transmitter for A/V signal output and power supply, hassle free on cable plugging
- Use regular cell phone/camcorder removable battery. Defective built-in battery problem is now a thing of past

Specification

Item Number	TB-2430	TB-1230
Frequency Band	2400MHz	1200MHz
Available Channel	4 Ch	3 Ch
Output Power	200 mW	150 mW
Trans. Range	200 Meter	200 Meter
Low-Batt. Alert	Yes, Vibration	
AC Charger	5 V / 2A	
DC Battery	3.6V / 1100mA	
Battery Charge Time	1.5 Hrs	
Battery Life Time	90 Muni es	100 Munites
Weight (TX)	55 g	
Dimension (TX)	80x 52x 22 mm	
Attached Receiver	RX-2480B	RX-1280B

Mechanical Sketch

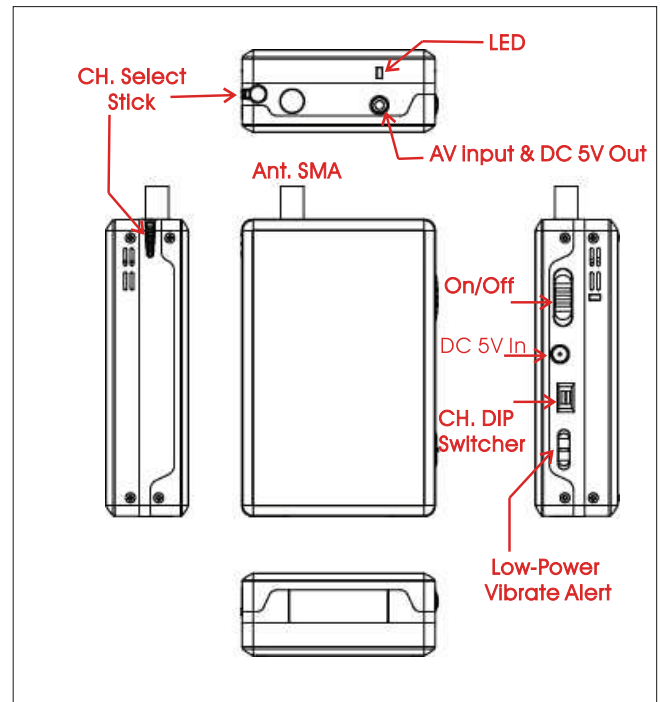

*Specification & appearance may be subjected to change without notice

Standard Full Package Kit & Order Model No.

TBR-2430CK



TB-2430
Portable Sender



RX-2480B
Portable Receiver

TBR-1230CK



TB-1230
Portable Sender



RX-1280B
Portable Receiver